

Elastomer Jaw Couplings
RINGFEDER® GWE 5103.1
Miniature coupling with extended clamping hubs and single slit

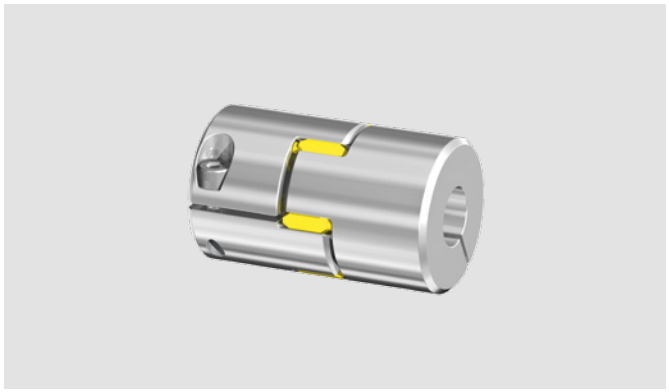

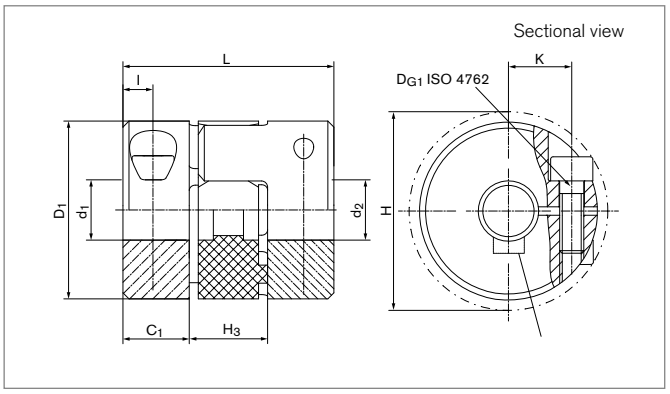

Size	$d_1;d_2$ min-max	$d_{1k};d_{2k}$ min-max	C_1	D_1	H	H_3	l	K	L
	mm	mm	mm	mm	mm	mm	mm	mm	mm
5	2 - 4	--- - ---	5	10	11,5	5	2,5	3,2	15
7	3 - 7	6 - 7	7	14	16,5	8	3,5	5	22
9	3 - 11	6 - 11	10	20	23,5	10	5	7,3	30

Transmission of the couplings transmissible torque T can not longer be guaranteed for certain with borings < d_{min}. Types with borings < d_{min}, however, can be supplied.

Moment of inertia and weight (mass) are calculated with reference to the largest bore size.

Size	T	H_{es}	n_{max}	J	Gw	D_{G1}	T_{A1}
	Nm		1/min	$10^{-3}kgm^2$	kg	mm	Nm
5	0,5	92 SH A	38000	0,000034	0,005	1 x M1,6	0,25
7	1,2	92 SH A	27000	0,000196	0,009	1 x M2	0,35
9	3	92 SH A	19000	0,00108	0,015	1 x M2,5	0,75

To continue see next page

Elastomer Jaw Couplings RINGFEDER® GWE 5103.1

Transmissible torque T [Nm]

Transmissible torque										
Size	Ø2	Ø3	Ø4	Ø5	Ø6	Ø7	Ø8	Ø9	Ø10	Ø11
	Nm									
5	0,5	0,5	0,5	---	---	---	---	---	---	---
7	---	0,8	1,1	1,2	1,2	1,2	---	---	---	---
9	---	1,5	2	2,5	2,9	3	3	3	3	3

Explanations

$d_1;d_{2min}$ = Min. bore diameter d_1/d_2
$d_1;d_{2max}$ = Max. bore diameter d_1/d_2
$d_{1k};d_{2kmin}$ = Min. bore diameter d_1/d_2 With keyway acc. to DIN 6885-1
$d_{1k};d_{2kmax}$ = Max. bore diameter d_1/d_2 With keyway acc. to DIN 6885-1
C_1 = Guided length in hub bore
D_1 = Outer diameter
H = Clearance diameter
H_3 = Length of damping module
I = Distance between center screw hole and hub end
K = Distance shaft axis - clamping screw axis
L = Total length
T = Transmissible torque at given T_A
H_{es} = Hardness of the elastomeric spider
n_{max} = Max. rotation speed
J = Total moment of inertia
Gw = Weight
D_{G1} = Thread
T_{A1} = Tightened torque of clamping screw D_{G1}

Ordering example

Series Size	Bore diameter d_1	Bore diameter d_2	Spider hardness (optional) [1]	Spider bore d_{bz} (optional) [1]	Further details
GWE 5103.1-9	10	11	80 SH A	6,5	*

[1] If a different spider hardness is selected, the detailed technical data for the sprockets must be observed. See chapter „Elastomer Jaw Couplings RINGFEDER® GWE Technical description“ in Product Paper & Tech Paper „RINGFEDER® Elastomer Jaw Couplings“
* Keyway

Further information on
RINGFEDER® GWE 5103.1
on **www.ringfeder.com**

Disclaimer of liability
All technical details and notes are non-binding and cannot be used as a basis for legal claims. The user is obligated to determine whether the represented products meet his requirements. We reserve the right carry out modifications at any time in the interests of technical progress.

RINGFEDER POWER TRANSMISSION